Electrical Winch 2




General Specifications

- Ideal for shallow or deepwater projects
- Dual configuration (Rope or Wire)
- Speed – average 35m/minute
- Over 2000m (10mm)
- 3-Phase 9KW 50hz
- All stainless steel construction

Services

A versatile electric winch capable of holding over 2Km of 10mm rope or coaxial cable. The winch is fitted with a slip ring enabling other cable configurations. With a line pull of approximately 1000kg the winch can be controlled locally or via remote making it ideal for seabed sampling or camera operations. With a relatively small footprint and power requirements make it an ideal choice for smaller boat operations. Lifted via 4 point lifting harness, or forklift pockets.



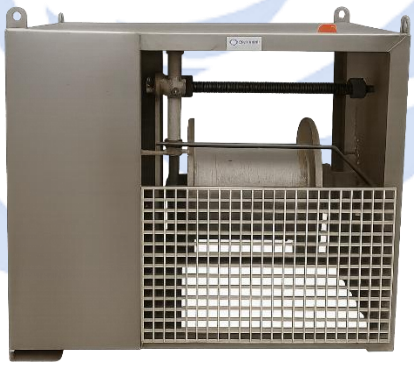

Specifics

Item	Value
Shipping Weight (Tare)	1000KG
Shipping Weight (Gross with Rope)	~ 1400KG
Shipping Weight (Gross with Wire)	~ 1700KG
Shipping Dimensions (L,W,H)	1500 x 1420 x 1550mm
Power	440, 9KW (20A)
Slip Ring	12 Conductor
Level wind	Yes
Cable counter	Yes
Pendant control	Yes
Line Pull	SWL 600kg 1st layer
Line Speed	0-43m/min

Benthic Solutions Limited, Unit A Greengates Way, Hoveton, Norwich, NR12 8ED, UK

☎ +44 (0) 1603 784726 ✉ enquiries@benthicsolutions.com 🌐 www.benthicsolutions.com